


NOTES:

- 1. W.P. JOINTS REQUIRED ON CENTERLINE FOR DRIVEWAYS 12' TO 20' WIDE. DRIVEWAYS 24' TO 30' WIDE SHALL HAVE 2 W.P. JOINTS EVENLY SPACED (AT 1/3 AND 2/3 POINTS).
- 2. PLACE SCORE MARKS AT 1/4 POINTS ON DRIVEWAYS 12' TO 20' WIDE AND AT 1/6 POINTS ON DRIVEWAYS 24' TO 30' WIDE. SCORE MARK REQUIRED AT DRIVEWAY SLOPE BREAK PARALLEL TO EXISTING FACE OF CURB.
- 3. 18" WIDE BAND OF PAVEMENT SHALL BE REMOVED AND REPLACED. SEE NOTE 5 OF GENERAL NOTES (APPENDIX A) FOR REQUIREMENTS.



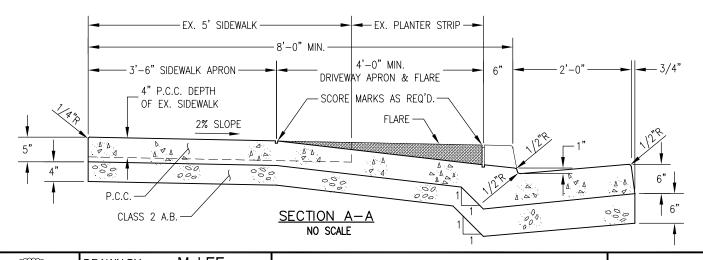

DRAWN BY: M. LEE

CHECKED BY: S. THACH

APPROVED BY: T. SUPAN

DATE: JANUARY 2007

RESIDENTIAL DRIVEWAY WITH SEPARATED SIDEWALK

ST-2

CITY OF SANTA CLARA

PAGE: 2